JINAN REMAX MACHINERY TECHNOOLGY CO.,LTD

COMPANY INTRODUCTION

Jinan Remax machinery technology co.,ltd is a high tech enterprise located the beautiful spring city Jinan, for those year, our comapny is engaged is providing the high quality plate steel cutting machine for customer, we keep exercise, and collect feedback for customers using, try to produce the more good use machine for every customer.

Since established in 2012, we produced table type plasma cutting machine, table type plasma and flame cutting machine, table type plasma and drilling machine, table type steel pipe cutting machine, gantry type plasma cutting machine, gantry type flame cutting machine, gantry type plasma and flame cutting machine, portable type plasma cutting machine etc.

we produce what customer want, and think what customer think. until now, we have cusotmer and agent over 40 countries, like Austria, French, Newzland, Saudi Arabia, Uganda, United Arab Emirates, Iraq, Russian, Spain etc. all the customer is a family of Remax, and we will keep taking care of every one. in future, we hope more friends can join us.

our goal is the same. to make the good machine, to do the satisfied business.

CONTENTS

1.Table type plasma cutting machine

2.table type plasma and flame cutting machine

3.gantry type flame cutting machine

4.gantry type plasma and flame cutting machine

5.Gantry type plasma and drilling flame cutting machine

6.table type steel pipe cutting machine

7.portable type plasma cutting machine

Application

The plasma cutting machine is used for cutting iron sheet, carbon steel, galvanized sheet, stainless sheet, Titanium plate and aluminum plate, etc. widely used in shipbuilding, duct, stoves, automobile, agricultural machinery, plate cutting, pressure vessel, tower, railway and aviation industries.



ZUOCE CERTIFICATION AND TESTING CENTER
Providing Professional Service for Safety and Health

CERTIFICATE OF CONFORMITY

CERTIFICATE NO.: ZUOCE150914036

The following products have been tested by us with listed standards and found in compliance with the council ***The Machinery Directive 2006/42/EC*** *and* ***The Low Voltage Directive 2006/95/EC****. It is possible to use CE mark to demonstrate the compliance with these EC directive.*

Applicant	*:Jinan Remax Machinery Technology Co., Ltd*
Address	*:Room 720 Building A, Rose Lane Greenland Jingliu Road, Huaiyin District, Jinan City, Shandong, P.R. China.*
Manufacture	*:Jinan Remax Machinery Technology Co., Ltd*
Address	*:Room 720 Building A, Rose Lane Greenland Jingliu Road, Huaiyin District, Jinan City, Shandong, P.R. China.*
Product	*:Plasma Cutting Machine*
Brand Name	*:Remax* Remax
Model No.	*:Remax-1215,Remax-1220,Remax-1318,Remax-1325,Remax-1525,Remax-1530, Remax-1540,Remax-1560,Remax-2030,Remax-2040,Remax-2060,Remax-3040, Remax-3060,Remax-3080,Remax-3012,Remax-4060,Remax-4080,Remax-4012*
Testing Standards	*: EN ISO 12100:2010 EN 60204-1:2006+A1:2009*

THIS VOC IS ONLY VALID IN CONNECTION WITH TECHNICAL REFERENCE: ZUOCE-JNRM-20150910-TCF02(Rev.0)

CE

Authorized Signer: Wallace Xu


Certification Manager

Date of Issue: 2015-09-14

Page 1/1

The CE Mark may only be used if all relevant and effective EC Directives are complied with

ZUOCE CERTIFICATION & TESTING CENTER Email for certificate query: certificate@zuoce.org Room 1804,Building 5,No.256 Lin Xia Road,Shanghai,China

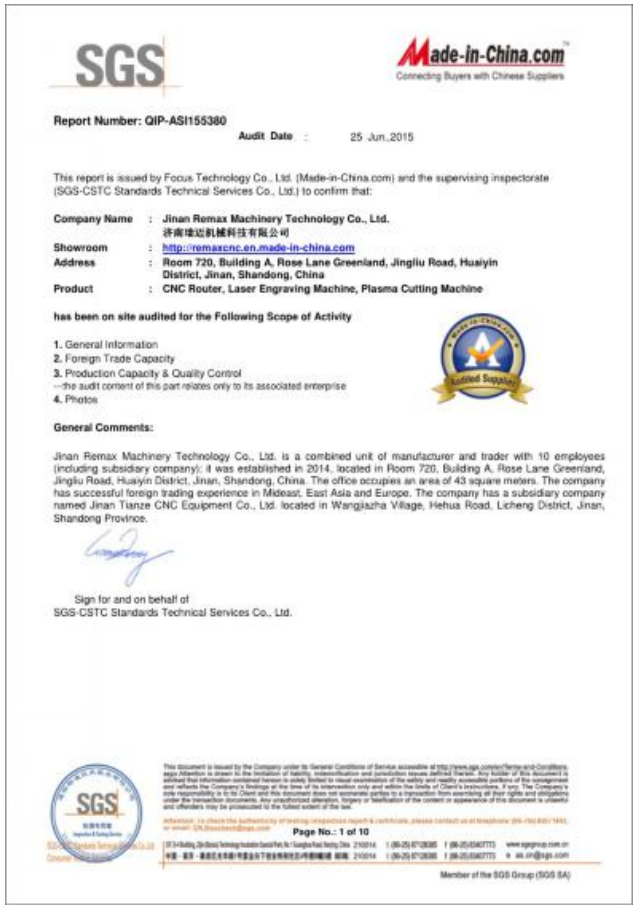

SGS

Made-in-China.com
Connecting Buyers with Chinese Suppliers

Report Number: QIP-ASI155380

Audit Date : 25 Jun.,2015

This report is issued by Focus Technology Co., Ltd. (Made-in-China.com) and the supervising inspectorate (SGS-CSTC Standards Technical Services Co., Ltd.) to confirm that:

Company Name	:	**Jinan Remax Machinery Technology Co., Ltd.** 济南锐迈机械科技有限公司
Showroom	:	**http://remaxcnc.en.made-in-china.com**
Address	:	**Room 720, Building A, Rose Lane Greenland, Jingliu Road, Huaiyin District, Jinan, Shandong, China**
Product	:	**CNC Router, Laser Engraving Machine, Plasma Cutting Machine**

has been on site audited for the Following Scope of Activity

1. General Information
2. Foreign Trade Capacity
3. Production Capacity & Quality Control
---the audit content of this part relates only to its associated enterprise
4. Photos

Audited Supplier

General Comments:

Jinan Remax Machinery Technology Co., Ltd. is a combined unit of manufacturer and trader with 10 employees (including subsidiary company); it was established in 2014, located in Room 720, Building A, Rose Lane Greenland, Jingliu Road, Huaiyin District, Jinan, Shandong, China. The office occupies an area of 43 square meters. The company has successful foreign trading experience in Mideast, East Asia and Europe. The company has a subsidiary company named Jinan Tianze CNC Equipment Co., Ltd. located in Wangjiazha Village, Hehua Road, Licheng District, Jinan, Shandong Province.

Sign for and on behalf of
SGS-CSTC Standards Technical Services Co., Ltd.

SGS

Page No.: 1 of 10

Member of the SGS Group (SGS SA)

table type plasma cutting machine



Products Features

1.Beams adopt welding structure with high precision and small inertia. the machine body is with high precision processing to prevent deformation. the support for workpiece is cutting by laser machine.
2.transmission structure is high precision rack and special reducer, and adopt taiwan liner rail to ensure high precision and high speed.
3.the driver system adopts USA chip control and high precision motor, provifing AC power with big torque to ensure running smoothly under the high speed.
4.the control ssytem is 7 screen, with English, Spanish, German,Russian,Chinese etc languange. the machine adopt high precision are pressure automatic THC.
5.optional function: plasma and flame, drilling and rotary
6.otional configuration: stepper motor/servo motor
7.machine size: A 1325: 1300*2500mm; B 1530: 1500*3000mm; C 1540: 1500*4000mm
D 1560: 1500*6000mm E 2040: 2000*4000mm

Technical parameters

Model	Remax-1530	
cutting methord	plasma	flame optional
cutting size	1500*3000mm	
machine size	3800*2200*1500mm	
lifting travel	≤150mm	
max travel speed and cutting speed	18000mm/min 0-15000mm/min	
running accuracy	≤0.005mm	≤0.1mmheight control
height control	are preessure auto THC	lifting body
cutting thickness	0.5-50mm	
cutting gas	air	oxygen+ethyne(propane)
gas pressure	0.4-0.8mpa	
voltage	380v 3 Phase 50/60HZ	
plasma power	Huayuan 63,100,120,200A;Hypertherm 65,105,125,200A	
software	FASTCAM	

table type plasma and flame cutting machine



Products Features

1.Beams adopt welding structure with high procision and small inertia. the machine body is with high precision processing to prevent deformation. the support for workpiece is cutting by laser machine.
2.transmission structure is high precision rack and special reducer, and adopt taiwan liner rail to ensure high precision and high speed.
3.the driver system adopts USA chip control and high precision motor, provifing AC power with big torque to ensure running smoothly under the high speed.
4.the control ssytem is 7 screen, with English, Spanish, German,Russian,Chinese etc languange. the machine adopt high precision are pressure automatic THC.
5.optional function: plasma and flame
6.otional configuration: stepper motor/servo motor
7.machine size: A 1325: 1300*2500mm; B 1530: 1500*3000mm; C 1540: 1500*4000mm
D 1560: 1500*6000mm E 2040: 2000*4000mm
8.the plasm and flame cutting head all is include, because it's table type, so considerd the work area, the plasma cutting head and flame cutting head share one THC together, they change work.

Technical parameters

Model	Remax-1530	
cutting methord	plasma and flame together	
cutting size	1500*3000mm	
machine size	3800*2200*1500mm	
lifting travel	≤150mm	
max travel speed and cutting speed	18000mm/min 0-15000mm/min	
running accuracy	≤0.005mm	≤0.1mmheight control
height control	share one THC	
cutting thickness	0.5-50mm	flaming 1-200mm
cutting gas	air	oxygen+ethyne(propane)
gas pressure	0.4-0.8mpa	
voltage	380v 3 Phase 50/60HZ	
plasma power	Huayuan 63,100,120,200A;Hypertherm 65,105,125,200A	
software	FASTCAM	

Gantry type flame cutting machine



Products Features

1.Beams adopt sare tube with high presicion and small inertia. the machine body is with high precision processing to prevent deformation.
2.transmission structure is high precision rack and special reducer, and adopt taiwan liner rail to ensure high precision and high speed.
3.the driver system adopts USA chip control and high precision motor, provifing AC power with big torque to ensure running smoothly under the high speed.
4.the control ssytem is 7 screen, with English, Spanish, German,Russian,Chinese etc languange. the machine adopt high precision are pressure automatic THC.
5.optional function: plasma and flame/ plasma/ flame
6.otional configuration: servo motor and Neugart speed reducer
7.machine size: 3000*6000/8000/12000mm; 4000*6000/8000/12000mm
8.the gantry type plasma cutting machine is can with plasma head, flame cutting head, and can also with two head together.

Technical parameters

Model	Remax-3080		
cutting methord	flame	plasma	flame and plasma
cutting size	2500*6000mm		
plasma power	Huayuan 63,100,120,200A;Hypertherm 65,105,125,200A		
lifting travel	≤150mm		
max travel speed and cutting speed	18000mm/min 0-15000mm/min		
running accuracy	≤0.005mm	≤0.1mmheight control	
height control	share one THC		
cutting thickness	1-200mm		
cutting gas	air	oxygen+ethyne(propane)	
gas pressure	0.4-0.8mpa		
voltage	380v 3 Phase 50/60HZ		
software	FASTCAM		
option	servo motor and driver		

Gantry type plasma and flame cutting machine




Products Features

1.Frame adopts thick steel sheet welding structure and overall annealing treatment with high precision and small inertia. XYZ axis is with high precision processing to prevent deformation.
2.transmission structure is high precision rack and special reducer, cable made by german materials to ensure running accuracy.
3.the drive system adopts USA chip control, double drive, panasonic servo motors, inovance servo motor or precision stepper motor are also available to providing AC power with big torque to ensure running smoothly under the high speed.
4.adopts high precision controller, with english and chinese language. and the machine also equip with automatic THC.
5.machine size: 3000*6000/8000/12000mm; 4000*6000/8000/12000mm etc

Technical parameters

Model	Remax-3010		
cutting methord	flame	plasma	flame and plasma
cutting size	2500*8000mm		
plasma power	Huayuan 63,100,120,200A;Hypertherm 65,105,125,200A		
lifting travel	≤170mm		
max travel speed and cutting speed	0-15000mm/min		
running accuracy	≤0.005mm	≤0.1mmheight control	
height control	are pressure auto THC	lifting body	
cutting thickness	plasma 1-50mm	flaming 1-200mm	
cutting gas	air	oxygen+ethyne(propane)	
gas pressure	0.4-0.8mpa		
driver system	dual drive		
servo motor	Japan panasonic servo motor / inovance		
x y axis	high quality rack & pinion and speed reducer		
power	380v 50HZ		
control system	Start/FLMC		
softwasre	FASTCAM		

Gantry type plasma and flame cutting machine with drilling

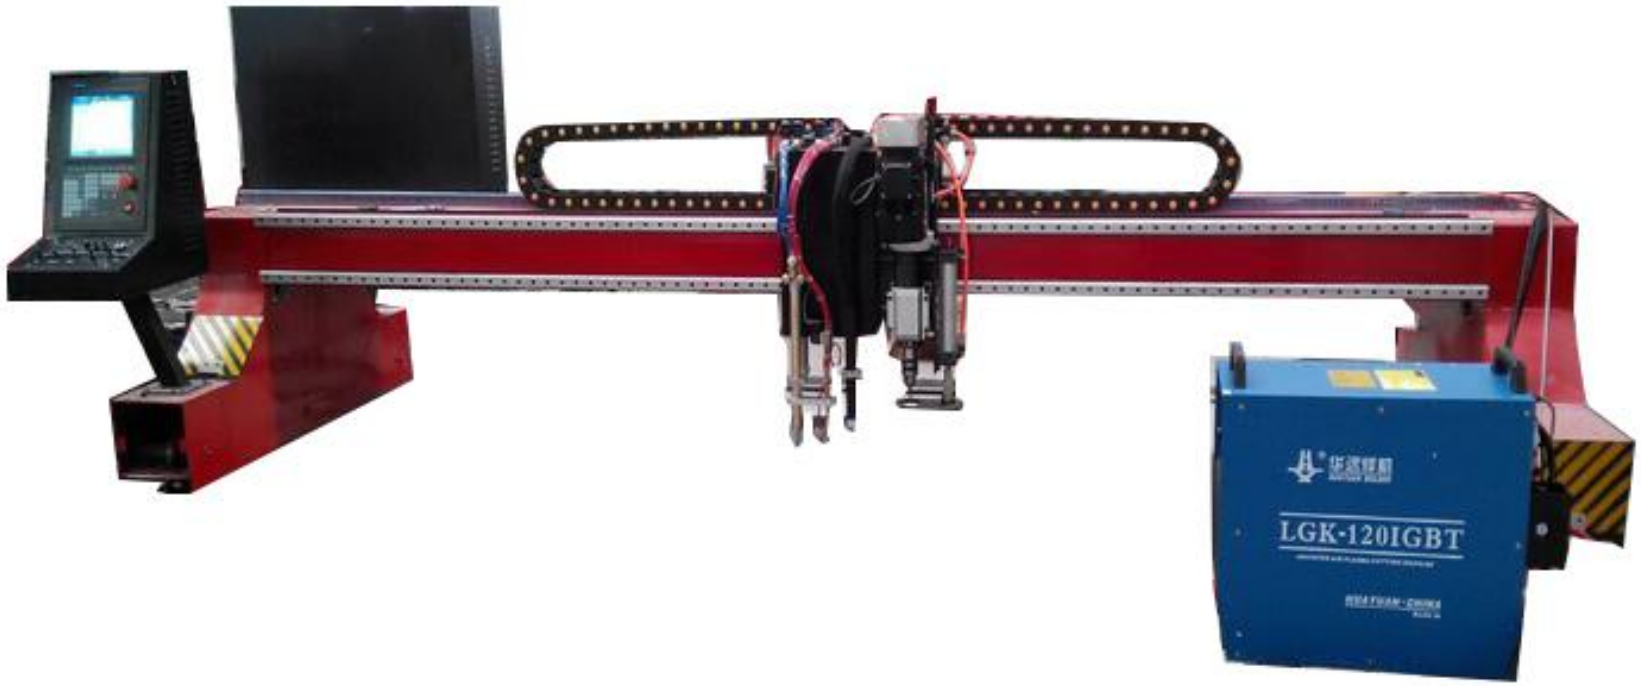

Products Features

Gantry Drilling and Cutting Machine, with large screen control system, high precision grinding rack, planetary reducer drive, is an efficient, high precision, high reliability cutting equipment. Bilateral drive, drilling and cutting machine can be completed in a graphics drilling, cutting. The machine supports titanium material software FASTCAM set out any plane graphics; leading a good man-machine interface makes the operation more convenient and simple, more quickly and accurately cut out a variety of complex shape of the plate, especially for medium and thick non-ferrous metal sheet , Stainless steel and carbon steel sheet automatic cutting cutting.
machine size: 3000*6000/8000/12000mm; 4000*6000/8000/12000mm etc

Technical parameters

item	
model	Remax-3010
x axis travel size	cutting length 3000mm
y axis travel size	cutting length 10000mm
electric parts	Schneider parts
The electromagnetic valve	Taiwan AIRTAC
auto fire	Automatic ignition device of high pressure package
plasma height control	angtai or hyd
control system	START or FLMC
cutting methods	plasma/ flame/drilling
driving way	y axis double driving
motor	servo motorspeed
speed reducer	Planetary gear reducer
rack	High precision large modulus rack
software	FASTCAM

Table type steel pipe plasma cutting machine



Products Features

Table type steel plate and pipe cutting machine, using the FLMC 2300X control system, 20 Taiwan square rail, rack ,1:5 rack gear transmission, it's a high efficiency, high accuracy, high stable cutting equipment. it can be made according the customers work requirement.
it can configurate with servo driver or stepper driver.
it with FASTCAM and Pipe Nesting software.
it can cut the steel plate and pipe steel.
Optional machine size: 1530: 1500*3000mm 1540: 1500*4000mm 2040: 2000*4000mm

Technical parameters

item	Remax-1530
transmission	Taiwan Hiwin square rails and rack gear
cutting size	1500*3000mm
Torch lift travel	≤150
cutting speed	0-12000mm/min
Maximum idle speed	15000mm/min
Running accuracy	≦0.1mm
cutting thickness	0.5-50mm
Increase the mode	HYD or Angtai THC
control system	FLMC 2300X
voltage	380v 50/60hz
plasma power	Huayuan 63,100,120,200A;Hypertherm 65,105,125,200A
software	FASTCAM and Pipe Nesting

portable type plasma cutting machine




Products Features

1.Adopt START control ssytem, it can cut arbitray complex planar shape, high efficiency, low cost.
2.the machien can read Auto CAD format file directly and turn into cutting program with humanized human machine interface and powerful automatic programming system with materials software.
3.this machine has special features of compact structure, beautiful style, light weight and convenient movement. it can cut by manual control, and also can cut automatically with stable movement and high cutting accuracy.
4.the machine adopts telescopic boom type structure, X, Y axis both adopt aviation aluminum alloy materials, high accuracy, no deformation and good appearance.
5.standard model: A1525: 1500*2500mm; B 1530: 1500*3000mm; C customised


Technical parameters


item	Remax-1530
cutting way	plasma
cutting size	1500*3000mm
Torch lift travel	≤100
cutting speed	0-12000mm/min
Maximum idle speed	15000mm/min
Running accuracy	≦0.1mm
cutting thickness	depend on the power source
Increase the mode	SF-25G THC
control system	Start
voltage	380v 50/60hz
plasma power	Huayuan 63,100,120,200A;Hypertherm 65,105,125,200A
software	FASTCAM

sample show

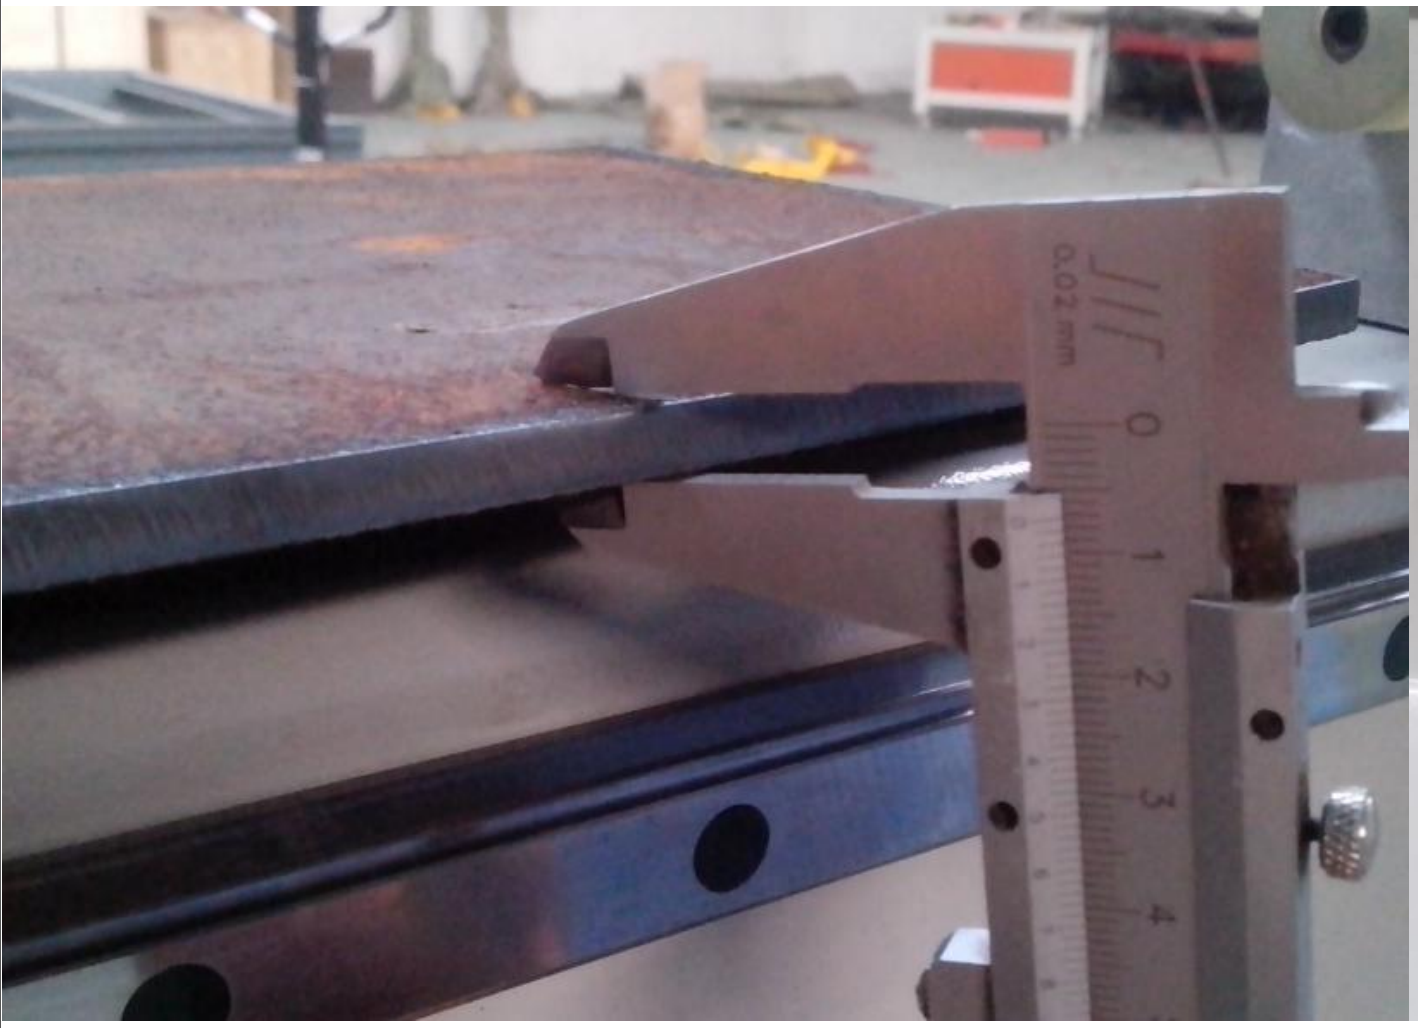



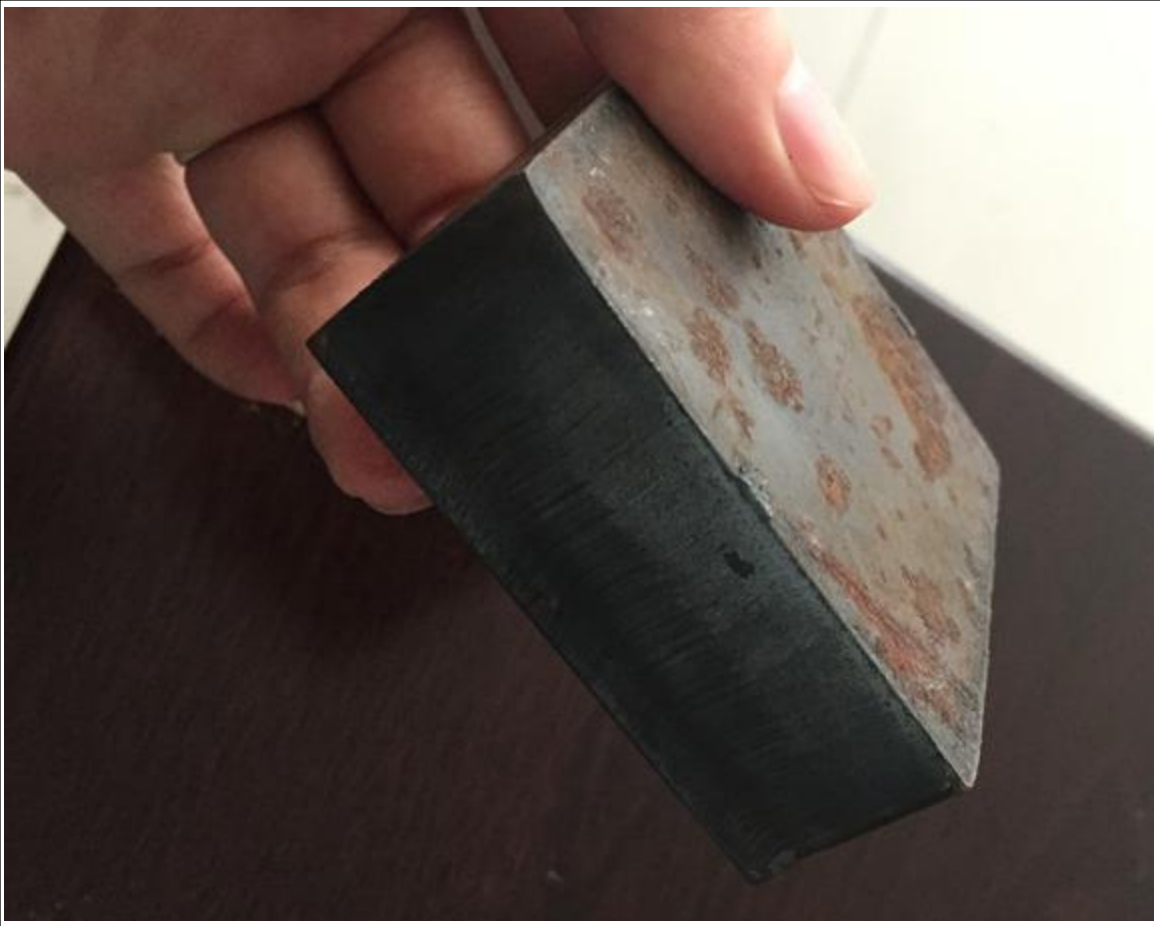

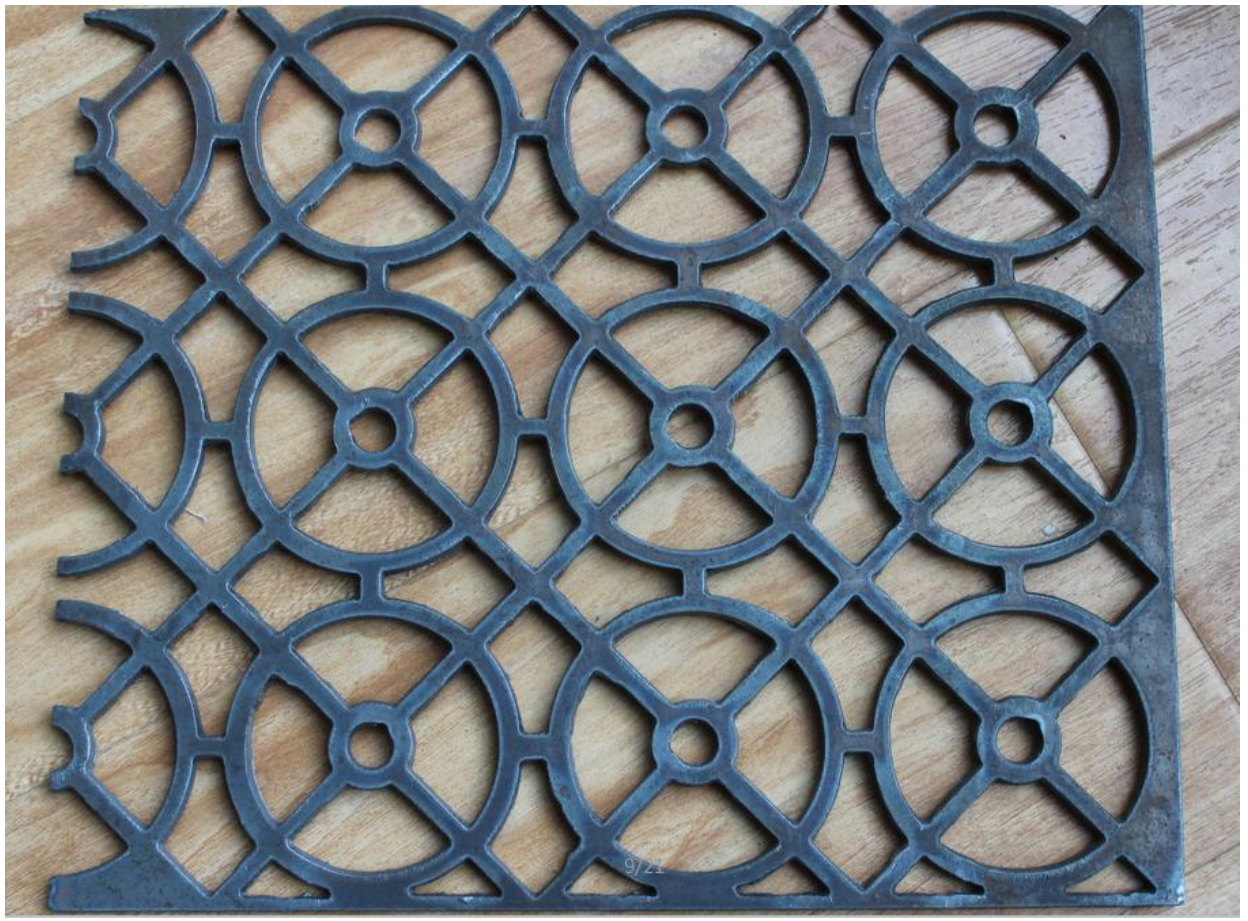

REMAX

JINAN REMAX MACINERY TECHNOLOGY CO.,LTD.

Address: Jingliu Road Huaiyin District, Jinan City, Shandong Province, China
telephone: + 86 0531 69984483
website: www.remaxcnc.com
email: cnc@remaxcnc.com

